


3A flexible heating cables are watertight and ready for use

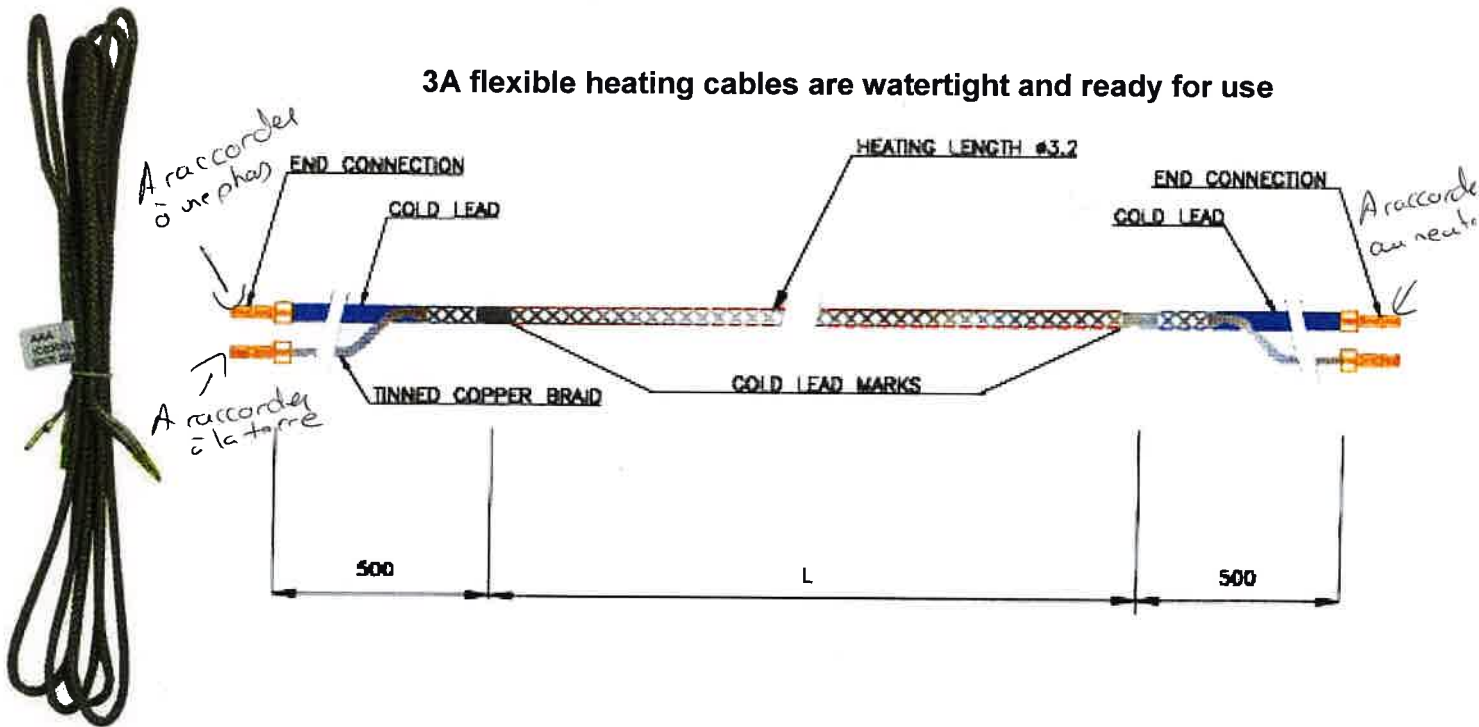

Applications :

- Framing of cold room doors and negative cabinets
- Doorstep of cold room
- Demisting of refrigerated showcases

Advantages :

- No over-thickness at junctions heating part/cold leads
- Heating part and cold leads are mechanically and electrically shielded

Caractéristiques techniques :

- Maximum maintaining temperature (power ON) : 140 °C
- Maximum exposure temperature (power OFF) : 180 °C
- Standard power : 30W/m
- Standard voltage : 230 V
- Standard lengths (multiple of 0.5 m) : from 1 to 8 m
- Tinned-copper braid from one end to the other end

Use precaution :

- The heating cable or cold lead must not be shortened
- The heating cable must not touch any sharp edged parts
- The heating cable must not cross or touch itself at any place

DOC0539A