



Réalisé avec 19/03/2025 avec réfrigération Xpress V 7.4.0- Central 18.1.2 base de données

Nom du projet: BSP3224YA11A
Adresse du projet France

Seules les données du databook sont valables. Ce programme utilise des approximations relatives à ces données.

1. Liste du matériel

Modèle	Qté	Description
BPS3224YA11A	1	LT monobloc

2. Groupe extérieur Système 1

2.1. Données de sélection

Référence complète du modèle	Application		
BPS3224YA11A	LT monobloc		
Réfrigérant			
Type	R290		
GWP	3		
Données de sélection		Rating conditions	
Position	Mural	EN17432	
Surrounding temperature	27,0°C		
Données mécaniques		Données Electriques	
Longueur	1010mm	Alimentation électrique	V1: 1x230V, 50Hz
Hauteur	850mm	Rated input	
Profondeur	650mm	Intensité de démarrage	
Poids	105,4kg	Intensité maxi	

The monoblock, during its operation, is discharging a lot of heat which would need to be removed to secure the good operation of the unit. We assume that where the monoblock is situated, the surrounding air is conditioned. This can come from a separate air conditioning unit or by an additional local ventilation system. It is the designer responsibility to define the real surrounding ambient design conditions of the place where the monoblock will be installed, because this has an impact on the delivered capacity of the selected monoblock as well as the operation of it.

Important notes:

- Supervising system for remote monitoring and cloud access (3MCB001ACC (LAN only) or 3MCB002ACC (LAN + WIFI)): If you have single or multiple monoblock installed within one cold room, you only required one device. This device can be connected to all installed monoblock with the usage of a 3rd party wiring connection. Please refer to the Installation manual how to connect.

GWP = Global Warming Potential




2.2. Capacity Table

T room	T surround	Max cap	Min cap	T room	T surround	Max cap	Min cap
°C	°C	kW	kW	°C	°C	kW	kW
-25,0	5,0	1,42		-15,0	5,0	2,56	
	10,0	1,41			10,0	2,42	
	15,0	1,41			15,0	2,28	
	20,0	1,40			20,0	2,14	
	25,0	1,39			25,0	2,01	
	30,0	1,27			30,0	1,87	
	32,0	1,22			32,0	1,80	
	35,0	1,16			35,0	1,72	
	40,0	1,04			40,0	1,57	
	45,0	0,89			45,0	1,41	
-20,0	5,0	2,17					
	10,0	2,06					
	15,0	1,93					
	20,0	1,81					
	25,0	1,69					
	30,0	1,56					
	32,0	1,52					
	35,0	1,43					
	40,0	1,30					
	45,0	1,16					

Cooling capacity according to EN 17432 «Packaged refrigerating units for walk-in cold rooms – Classification, performance and energy consumption testing».

T room	T surround	Volume (m³)		
°C	°C	Wall 80mm	Wall 100mm	Wall 120mm
-25,0	5,0	20,20	22,80	25,60
	10,0	17,80	20,10	22,50
	15,0	15,40	17,40	19,50
	20,0	14,10	15,90	17,90
	25,0	11,40	12,90	14,50
	30,0	10,70	12,10	13,60
	32,0	10,20	11,50	13,00
	35,0	9,20	10,40	11,60
	40,0	7,10	8,00	9,00
	45,0	5,30	6,00	6,70
-20,0	5,0	29,00	32,60	36,70
	10,0	26,10	29,40	33,00
	15,0	23,20	26,20	29,40
	20,0	20,40	23,00	25,90
	25,0	16,10	18,10	20,40
	30,0	15,70	17,70	19,90
	32,0	14,90	16,80	18,80
	35,0	14,20	16,00	18,00
	40,0	11,40	12,90	14,50
	45,0	9,00	10,10	11,40
-15,0	5,0	41,40	46,70	52,50
	10,0	37,70	42,50	47,80
	15,0	34,10	38,40	43,20
	20,0	30,50	34,40	38,60
	25,0	25,30	28,50	32,00
	30,0	24,30	27,40	30,80
	32,0	23,20	26,10	29,40
	35,0	21,10	23,70	26,70
	40,0	16,90	19,00	21,40
	45,0	14,10	15,90	17,80

2.3. Plan d'encombrement


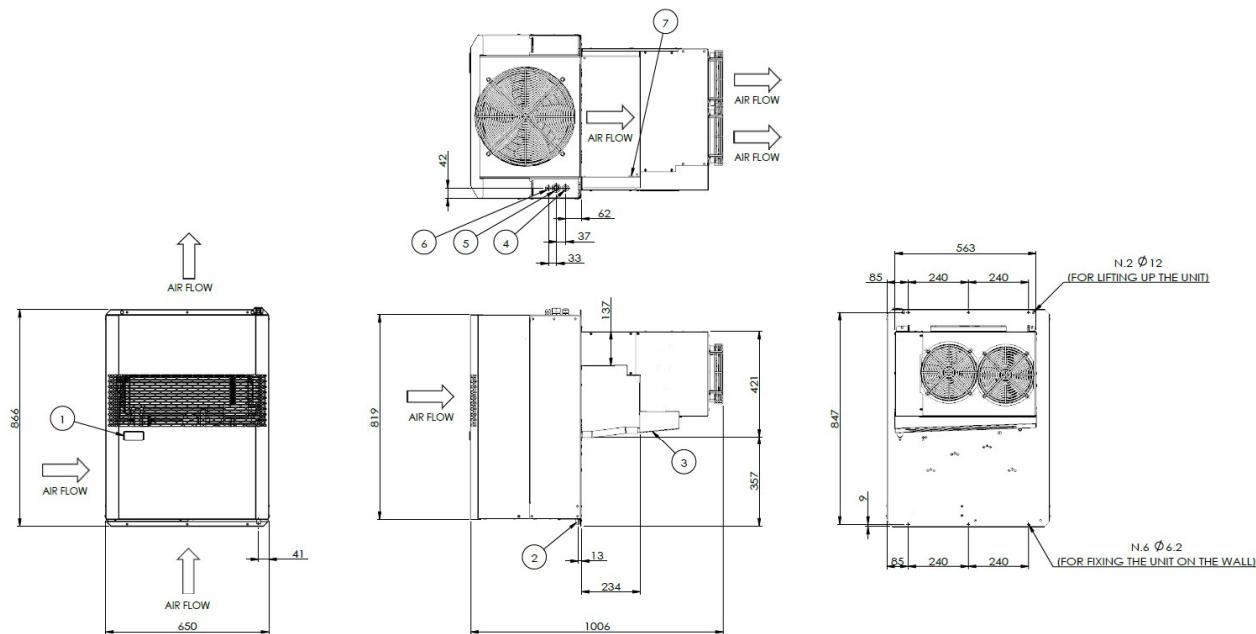



MEDIUM TEMPERATURE		
No.	Name	Note
1	Controller	
2	Drain outlet pipe	O.D. 14mm
3	Drain pan	
4	Cable for power supply	5m
5	Optional	
6	Cable for door switch	5m
7	Cable for light	2m

LOW TEMPERATURE		
No.	Name	Note
1	Controller	
2	Drain outlet pipe	O.D. 14mm
3	Drain pan	
4	Cable for door heater	5m
5	Cable for power supply	5m
6	Cable for door switch	5m
7	Cable for light	2m

2D155751

2.4. Schéma électrique

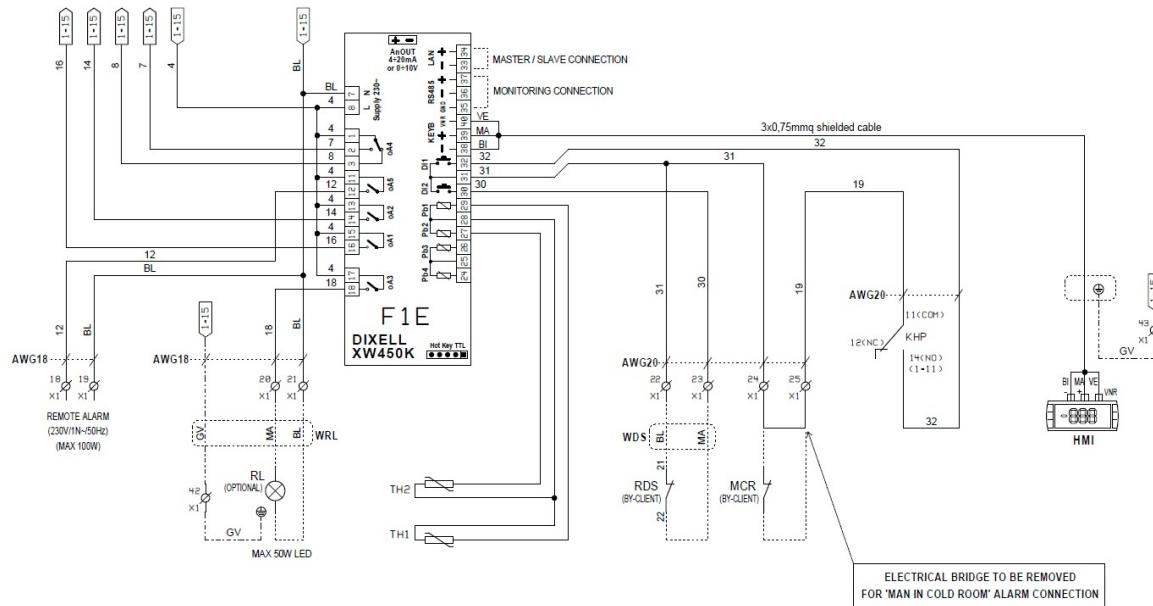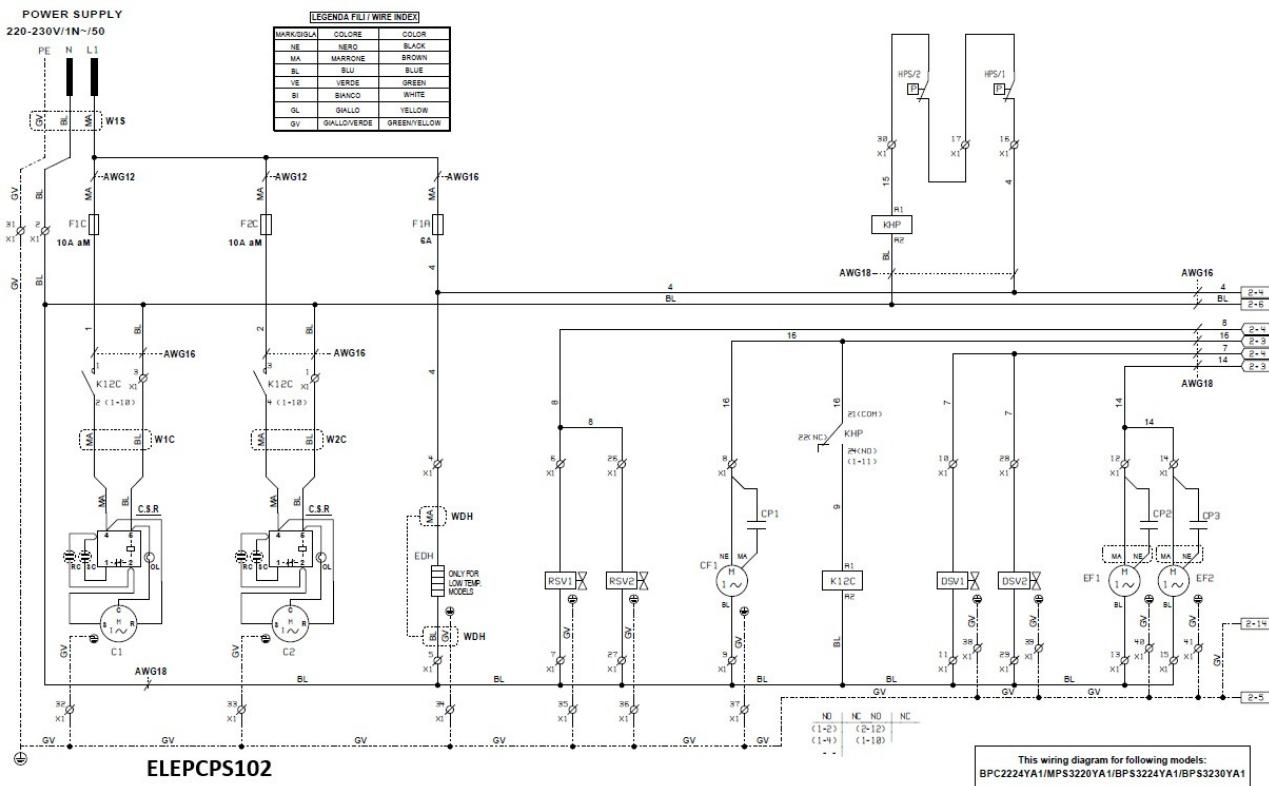

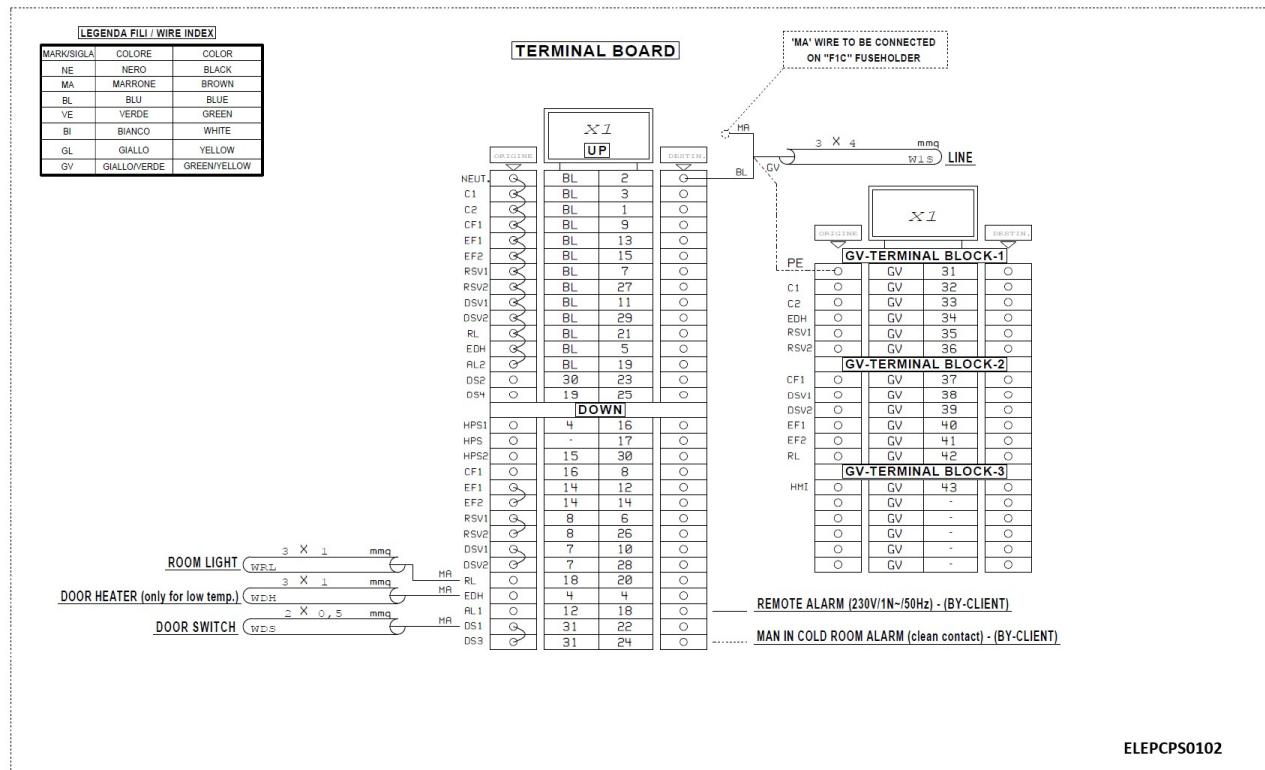


DEVICE DISPOSIT.	DESCRIPTION / DESCRIZIONE
C1	COMPRESSOR 1 / COMPRESSORE 1
C2	COMPRESSOR 2 / COMPRESSORE 2
C.S.R.	COMPRESSOR STARTING KIT / KIT AVVIAMENTO COMPRESSEORE
CF1	CONDENSER FAN 1 / VENTOLA CONDENSATORE 1
CP1	CONDENSER FAN1 CAPACITOR / CONDENSATORE VENTOLA 1 CAPACITA'
CP3	EVAPORATOR FAN1 CAPACITOR / EVAPORATORE VENTOLA 1 CAPACITA'
CP4	EVAPORATOR FAN2 CAPACITOR / EVAPORATORE VENTOLA 2 CAPACITA'
DSV1	DEFROST SOLENOID VALVE 1 / VALVOLA SOLENOIDE DI SBRINAMENTO 1
DSV2	DEFROST SOLENOID VALVE 2 / VALVOLA SOLENOIDE DI SBRINAMENTO 2
EDH	DOOR HEATER / RESISTENZA PORTA
EF1	EVAPORATOR FAN 1 / VENTOLA EVAPORATORE 1
EF2	EVAPORATOR FAN 2 / VENTOLA EVAPORATORE 2
F1C	COMPRESSOR1 FUSE / FUSIBILE COMPRESSORE1
F2C	COMPRESSOR2 FUSE / FUSIBILE COMPRESSORE2
F1A	AUXILIARY FUSE / FUSIBILE AUSILIARIO
F1E	CONTROL UNIT / UNITA' DI CONTROLLO
HPS/1	HIGH PRESSURE SWITCH 1 / PRESSOSTATO ALTA PRESSIONE 1
HPS/2	HIGH PRESSURE SWITCH 2 / PRESSOSTATO ALTA PRESSIONE 2
HMI	HUMAN MACHINE INTERFACE
K12C	COMPRESSOR 1-2 RELAY / RELE' COMPRESSORE 1-2
KHP	HIGH PRESSURE SWITCH RELAY / RELE' PRESSOSTATO ALTA PRESSIONE
MCR	MAN IN COLD ROOM ALARM / ALLARME UOMO IN CELLA
RSV1	REFRIG. SOLENOID VALVE 1 / REFRIGER. VALVOLA SOLENOIDE 1
RSV2	REFRIG. SOLENOID VALVE 2 / REFRIGER. VALVOLA SOLENOIDE 2
RL	ROOM LIGHT (OPTIONAL) / LUCE CELLA (OPZIONALE)
RDS	ROOM DOOR SWITCH / MICRO PORTA (BY-CLIENT)
TH1	AMBIENT PROBE / SONDA AMBIENTE

DEVICE DISPOSIT.	DESCRIPTION / DESCRIZIONE
TH2	DEFROST PROBE / SONDA SBRINAMENTO
TH3	CONDENSER PROBE / SONDA CONDENSATORE
W1S	SUPPLY CABLE / CAVO DI ALIMENTAZIONE
W1C	COMPRESSOR 1 CABLE / CAVO COMPRESSORE 1
W2C	COMPRESSOR 2 CABLE / CAVO COMPRESSORE 2
WRL	ROOM LIGHT CABLE / CAVO LUCE CELLA
WDS	DOOR SWITCH CABLE / CAVO MICRO PORTA

ELEPCPS0102

2.5. Schéma frigo

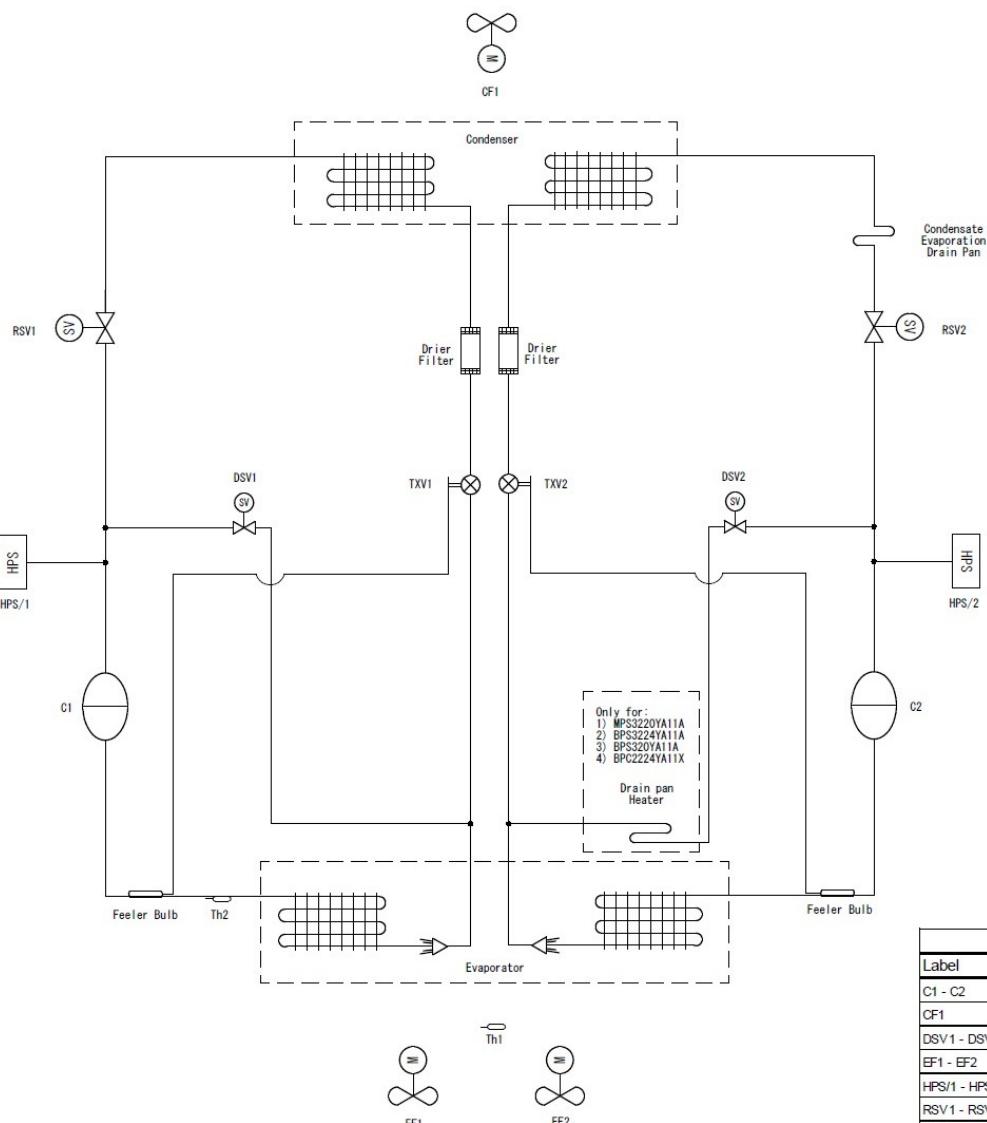

3D154479

LEGEND	
Label	Description
C1 - C2	Compressor
CF1	Condenser fan
DSV1 - DSV2	Defrost solenoid valve
EF1 - EF2	Evaporator fan
HPS/1 - HPS/2	High pressure switch
RSV1 - RSV2	Refrigerant solenoid valve
Th1	Cold room temperature probe
Th2	Defrost temperature probe
TXV1 - TXV2	Thermostatic expansion valve

3. Device specifications

3.1. BPS3224YA11A

BPS3224YA11A					
Unit general specification	Unit	Model			BPS3224YA11A
		Type			MB
	Capacity range				3224
	Nominal Capacity	EN13215	Cooling (TCR = 0°C / Tamb = 32°C)	kW	
			Freezing (TCR = -20°C / Tamb = 32°C)	kW	1,89
		EN17432	Cooling (TCR = 0°C / Tamb = 32°C)	kW	
			Freezing (TCR = -20°C / Tamb = 32°C)	kW	1,52
	Nominal Capacity	EN13215	Cooling (TCR = 0°C / Tamb = 32°C)	kW	
			Freezing (TCR = -20°C / Tamb = 32°C)	kW	
		EN17432	Cooling (TCR = 0°C / Tamb = 32°C)	kW	
			Freezing (TCR = -20°C / Tamb = 32°C)	kW	
	Cold room volume		Cooling (TCR = 0°C / Tamb = 32°C / 100 mm)	l	
			Freezing (TCR = -20°C / Tamb = 32°C / 100 mm)	l	0,0
	Power input	EN13215	Cooling (TCR = 0°C / Tamb = 32°C)	kW	
			Freezing (TCR = -20°C / Tamb = 32°C)	kW	1,80
		EN17432	Cooling (TCR = 0°C / Tamb = 32°C)	kW	
			Freezing (TCR = -20°C / Tamb = 32°C)	kW	1,86
	Power input		Max.	kW	
Refrigerant	Refrigerant	Type			R290
		GWP			3
		Circuits	Quantity		2
		Charge		kg	15,0
Operation enveloppe	Operation range	Cold room temperature	Min.	°C	-25,0
			Max.	°C	-15,0
		Ambient temperature	Min.	°C	5,0
			Max.	°C	45,0
Compressor	Compressor circuit 1	Compressor	Type	Hermetic reciprocating	
		Model			
		Swept volume		l/s	
		Output			
		Starting method		ON/OFF	

Le présent rapport est établi à titre d'information uniquement et ne constitue pas une offre exécutoire de Daikin. Daikin a élaboré le contenu de ce rapport au meilleur de sa connaissance. Aucune garantie expresse ou implicite n'est donnée quant à l'exhaustivité, l'exactitude, la fiabilité ou l'adéquation à un usage particulier de son contenu. Spécifications et les prix sont sujets à changement sans préavis. Daikin rejette explicitement toute responsabilité pour tout dommage direct ou indirect, au sens large, résultant de ou liés à l'utilisation et / ou l'interprétation de ce rapport.

	Compressor circuit 2	Compressor	Type	Hermetic reciprocating
	Model			
	Swept volume		l/s	
	Output			
	Starting method			ON/OFF
	Compressor circuit 3	Compressor	Type	
	Model			
	Swept volume		l/s	
	Output			
	Starting method			
Condenser/Evaporator	Condenser	Material		
	Treatment			
	Fan number			
	Air flow		l/s	286,1
	Evaporator	Material		
	Treatment			
	Fan number			
	Air flow		l/s	341,7
	Air throw (According to CECOMAF GT 6-001 (final velocity = 0,25 m/s)		m	5,0
	Defrost			Hot gas
Unit layout	Casing	Colour		White
		Material		pre-painted metal sheet.
		IP calss		IPX0
	Dimensions	Unit	Height	mm 850
			Width	mm 1010
			Depth	mm 650
		Packed unit	Height	mm 1082
			Width	mm 1040
			Depth	mm 684
	Weight	Unit		kg 105.4
		Packed unit		kg 127.9
PED	PED	Category		I
Installation	Characteristics of the hole where to accommodate the units (straddle installation)	Height		mm 145
		Width		mm 40
	Characteristics of the hole where to accommodate the units (through the wall installation)	Height		mm 440
		Width		mm 585
Sound	Sound pressure level	Nom. (According to UNI EN ISO 3746)		dBA 47,5
Electrical data	Rated input	For MT (Medium Temperature) Operation.	A	
		For LT (Low Temperature) Operation.	A	9.22
	Power supply	Peak current unit		A
		Max current unit		A 12.22
		Minimum circuit amps (MCA)		A
		Maximum fuse amps (MFA)		A 10,0
		Voltage range	Max.	250
			Min.	207
		Voltage		230
		Phase		1N~

Le présent rapport est établi à titre d'information uniquement et ne constitue pas une offre exécutoire de Daikin. Daikin a élaboré le contenu de ce rapport au meilleur de sa connaissance. Aucune garantie expresse ou implicite n'est donnée quant à l'exhaustivité, l'exactitude, la fiabilité ou l'adéquation à un usage particulier de son contenu. Spécifications et les prix sont sujets à changement sans préavis. Daikin rejette explicitement toute responsabilité pour tout dommage direct ou indirect, au sens large, résultant de ou liés à l'utilisation et / ou l'interprétation de ce rapport.



4. Spécifications

Général

To increase the efficiency of the system, please group all the cabinets with the same operating condition together, because it is the refrigerated cabinet or evaporator with the lowest evaporation temperature that will determine the evaporation temperature of the outdoor unit.

CVP

- Il est important de charger le Conveni Pack avec la plus grande charge frigorifique pour maximiser la récupération de la chaleur.
- La capacité de climatisation est donnée à une température ambiante du magasin de 22°C en hiver et 20°C en été, aux conditions de la température extérieure.
- La capacité de climatisation ainsi que la capacité de chauffage délivrée par les unités intérieures seront plus élevés lorsque le ratio de capacité intérieure maximale est utilisé.

ZEAS

- Aucune unité intérieure de climatisation ne peut être connectée à une unité de ZEAS.